


# Kingtronics®

# GKT-AY

## Polymer Aluminum Solid Electrolytic Capacitor

### FEATURES


- ◆ Low ESR, high ripple current, high voltage, long life
- ◆ Endurance:5000 hours at 105°C



### SPECIFICATIONS

Category Temperature Range (°C)	-55°C ~ +105°C		
Rated Voltage Range	35 ~ 160V		
Capacitance Tolerance (20°C, 120Hz)	±20%		
Leakage Current	I ≤ 0.1CV or 299µA whichever is greater Less than or equal to the specified value. After 2 minutes application of rated Voltage at 20°C		
Dissipation Factor (20°C, 120Hz)	Rated Voltage(V)	35~100	
	Tanδ (Max)	0.12	
Low Temperature Characteristics (Max. Impedance Ratio)	Z(-25°C)/Z(+20°C)	≅ 1.25	(100KHz)
	Z(-55°C)/Z(+20°C)	≅ 1.25	
Endurance	The specifications listed below shall be satisfied when the capacitors are restored to 20°C after application of rated voltage for 5000 hours at 105°C.		
	Appearance	No significant damage	
	Capacitance change	≅ ±20% of the initial value	
	D.F.(tanδ)	≅ 150% of the specified value	
	ESR	≅ 150% of the specified value	
Damp Heat (Steady State)	The specifications listed below shall be satisfied when the capacitors are restored to 20°C after application of rated voltage for 1000 hours at 60°C, 90% ~ 95% RH.		
	Appearance	No significant damage	
	Capacitance change	≅ ±20% of the initial value	
	D.F.(tanδ)	≅ 150% of the specified value	
	ESR	≅ 150% of the specified value	
Surge Voltage	Surge Voltage=Rated voltage × 1.15(V) The capacitors shall be subjected to 1000 cycles each consisting of charge with the surge voltages specified at 105°C for 30 seconds through a protective resistor (Rc=1kΩ) and discharge for 5 minutes 30 seconds.		
	Appearance	No significant damage	
	Capacitance change	≅ ±20% of the initial value	
	D.F.(tanδ)	≅ 150% of the specified value	
	ESR	≅ 150% of the specified value	
	Leakage current	≅ The specified value	

### DIMENSIONS (mm)

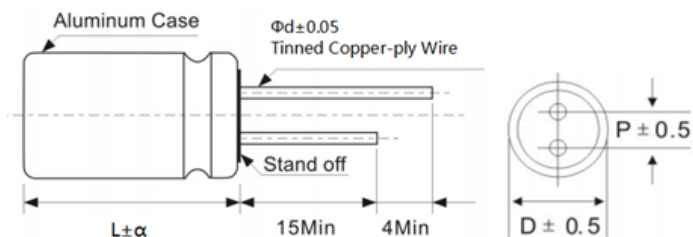

ΦD	5	5.5	6.3	8	10
P	2.0	2.5	2.5	3.5	5.0
Φd	0.5	0.5	0.6	0.6	0.6

α	(L < 16) 1.0
	(16 ≅ L < 22) 1.5
	(L ≅ 22) 2.0

**Kingtronics® International Company**

**Kingtronics**®**GKT-AY**

Polymer Aluminum Solid Electrolytic Capacitor

**RATED RIPPLE CURRENT COEFFICIENT**

Frequency(Hz)	120Hz $\cong$ f < 1kHz	1kHz $\cong$ f < 10kHz	10kHz $\cong$ f < 100kHz	100kHz $\cong$ f < 500kHz
Coefficient	0.05	0.30	0.70	1.00

**STANDARD RATINGS**

Rated Voltage	Rated Capacitance ( $\mu$ F)	Case Size $\Phi$ DxL (mm)	ESR (m $\Omega$ ) at 20°C, 100 KHz	Leakage Current ( $\mu$ A)	Rated Ripple Current (mA <sub>rms</sub> /105°C/100kHz)
35	10	5x8	120	299	1100
	22	5x8	120	299	1100
	33	5x8	120	299	1100
	47	5x8	120	299	1100
		6.3x8	80	299	1350
	68	5x8	120	299	1100
		6.3x8	70	299	1350
	100	5x11	120	350	1500
		6.3x7	80	350	1200
		6.3x8	50	350	1500
		8x9	40	350	1700
	150	8x9	40	525	1700
	220	6.3x12	40	770	1700
		8x9	40	770	1700
		8x12	35	770	2500
8x12		35	1155	2500	
330	10x12.5	30	1155	2900	
	10x12.5	30	1645	2900	
560	10x12.5	30	1960	2900	
50	10	5x8	120	299	550
	22	5x8	120	299	550
		6.3x8	110	299	850
	33	5x9	120	299	650
		6.3x8	100	299	850
	47	5x11	100	299	850
		6.3x8	80	299	900
		6.3x12	70	299	1150
		8x9	60	299	1150
	100	6.3x12	50	500	1150
		8x9	50	500	1150
		8x12	40	500	1380
150	8x12	40	750	1380	
220	10x12.5	35	1100	1650	

**Kingtronics**® International CompanyWebsite: [www.kingtronics.com](http://www.kingtronics.com) Email: [info@kingtronics.com](mailto:info@kingtronics.com) Tel: (852) 8106 7033 Fax: (852) 8106 7099

**Kingtronics**®**GKT-AY**

Polymer Aluminum Solid Electrolytic Capacitor

**STANDARD RATINGS**

Rated Voltage	Rated Capacitance (μF)	Case Size ΦDxL (mm)	ESR (mΩ) at 20°C, 100 KHz	Leakage Current (μA)	Rated Ripple Current (mArms/105°C/100kHz)
63	10	5x8	120	299	500
	22	5x11	120	299	650
		6.3x8	100	299	750
	33	6.3x8	100	299	750
	47	6.3x12	70	299	950
		8x9	60	299	950
	82	8x12	45	517	1300
		10x12.5	38	517	1800
100	8x12	45	630	1300	
	10x12.5	38	630	1800	
220	10x12.5	35	1386	1800	
80	10	6.3x8	120	299	550
	15	6.3x8	120	299	550
	22	8x9	80	299	1100
		8x12	60	299	1300
	33	10x12.5	45	299	1700
	39	10x12.5	45	312	1700
	47	8x12	60	376	1300
		10x12.5	45	376	1800
	56	10x12.5	45	448	1800
	82	10x12.5	45	656	1800
100	10x12.5	45	800	1800	
100	10	6.3x8	120	299	550
	22	6.3x12	90	299	820
		8x9	90	299	850
	33	8x12	70	330	1190
	47	10x12.5	60	470	1550
100	10x15	50	1000	1790	
160	4.7	8x9	350	299	550
	10	8x12	250	299	750
	15	8x12	250	299	750
		10x10	300	299	650
	18	10x12.5	200	299	950
	22	10x12.5	200	350	950

Note: Reflow soldering can only be used for SMD Conductive Polymer Aluminum Solid Electrolytic Capacitor.

Radial Conductive Polymer Aluminum Solid Electrolytic Capacitor are not suitable for reflow soldering, but only for wave soldering.

Note: Specification are subject to change without notice. For more detail and update, please visit our website.

**Kingtronics**® International Company

Website: [www.kingtronics.com](http://www.kingtronics.com)

Email: [info@kingtronics.com](mailto:info@kingtronics.com)

Tel: (852) 8106 7033

Fax: (852) 8106 7099

**Kingtronics**®**GKT-AY**

Polymer Aluminum Solid Electrolytic Capacitor

**HOW TO ORDER**

<u>GKT</u>	<u>AY</u>	<u>0J</u>	<u>0R1</u>	<u>M</u>	<u>00500095</u>	<u>020</u>	<u>000</u>	<u>B</u>	<u>R</u>
Series	Sub Series	Rated Voltage	Capacitance	Capacitance Tolerance	Dimension	Pitch/Pins	Lead Length	Packing	Pb
		1.	2.	3.	4.	5.	6.	7.	8.

**NOTE:****1. Rated Voltage**

Code	0J	1A	1C	1D	1E	1V	1G	1H
Voltage	6.3V	10V	16V	20V	25V	35V	40V	50V

**2. Capacitance**

Code	0R1	R22	R33	R47	010	2R2	3R3	4R7	100	220	330	470	101
Capacitance (μF)	0.1	0.22	0.33	0.47	1	2.2	3.3	4.7	10	22	33	47	100

**3. Capacitance Tolerance**

Code	K	L	M
Tolerance	±10%	±15%	±20%

**4. Dimension**

Code	00500095	00630085	01000120
Dimension (mm)	5x9.5	6.3x8.5	10x12

**5. Pitch**

Code	020	025	035	050	075	100
Pitch (mm)	2.0	2.5	3.5	5.0	7.5	10.0

**6. Lead Length**

Code	000	040	045	050
Lead Length	Standard	4.0	4.5	5.0

**7. Packing**

Code	A	B
Packing	Ammo	Bulk

**8. Pb**

Code	L	R
Pb	Leaded	RoHS

Note: Specifications are subject to change without notice.

**Kingtronics**® International CompanyWebsite: [www.kingtronics.com](http://www.kingtronics.com)Email: [info@kingtronics.com](mailto:info@kingtronics.com)

Tel: (852) 8106 7033

Fax: (852) 8106 7099