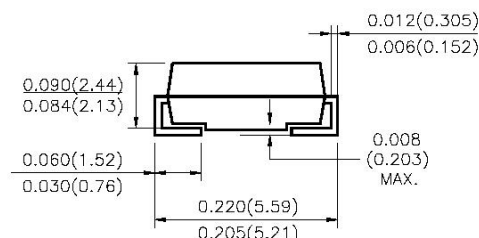
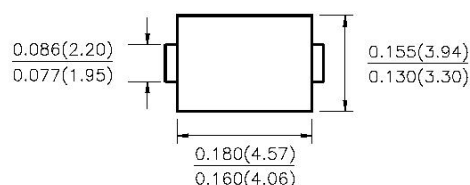


Kingtronics®**SS22 THRU SS210****SURFACE MOUNT SCHOTTKY BARRIER RECTIFIER****VOLTAGE RANGE** 20 to 100 Volts**CURRENT** 2.0 Ampere**FEATURES**

Low profile surface mount package
 Built in strain relief
 High switching speed
 Low voltage drop, high efficiency
 For use in low voltage high frequency inverters
 Free willing, and polarity protection applications
 Guardring for over voltage protection

MECHANICAL DATA

Case: Transfer molded plastic
Epoxy: UL 94V-0 rate flame retardant
Lead: Solder plated, solderable per MIL-STD-750 method 20;
Polarity: Color band denotes cathode end
Weight: 0.003 ounce, 0.093 gram

DO-214AA (SMB)**Dimensions in inches and (millimeters)****MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified ,
 Single phase, half wave, 60Hz, resistive or inductive load.

For capacitive load derate current by 20%


PARAMETER	SYMBOL	SS22	SS23	SS24	SS25	SS26	SS28	SS29	SS210	UNIT
Maximum Repetitive Peak Reverse Voltage	VRRM	20	30	40	50	60	80	90	100	Volts
Maximum RMS Voltage	VRMS	14	21	28	35	42	56	63	70	Volts
Maximum DC Blocking Voltage	VDC	20	30	40	50	60	80	90	100	Volts
Maximum Average Forward Rectified Current at TL see figure 1 TL =105°C	I(AV)	2.0								Amps
Peak Forward Surge Current 8.3mS single half sine-wave superimposed on rated load	IFSM	50								Amps
Maximum Instantaneous Forward Voltage @ 2.0A(Note1)	VF	0.55			0.70		0.85			Volts
Maximum DC Reverse Current at rated DC Blocking Voltage per element	IR	0.5								mA
		20.0				10.0				
Typical Thermal Resistance (Note 2)	RθJA	55								°C/W
	RθJL	12								
Operating Junction Temperature	TJ	-55 to +125				-55 to +125				°C
Storage Temperature Range	TSTG	-55 to +150								°C

1. Pulse test: 300µs pulse width, 1% duty cycle.
2. PCB mounted with 0.2"×0.2" (5.0mm×5.0mm) copper pads.


Kingtronics® International Company

RATINGS AND CHARACTERISTIC


F1G.1-FORWARD CURRENT DERATING CURVE

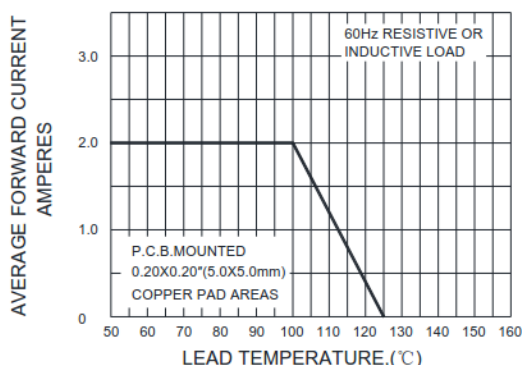


F1G.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

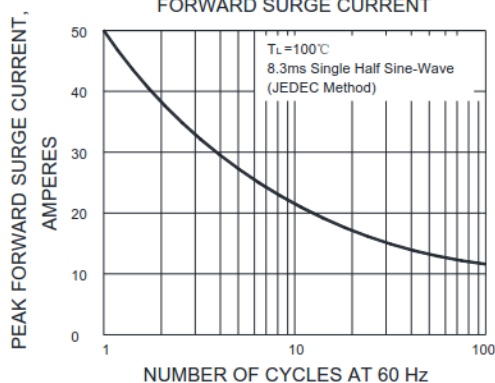


F1G.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

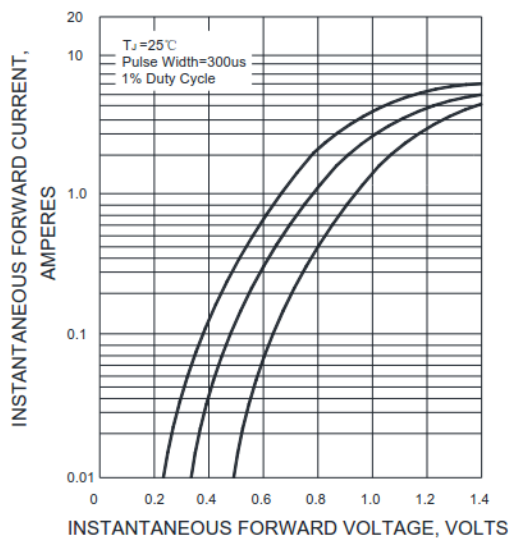

F1G.4-TYPICAL REVERSE CHARACTERISTICS

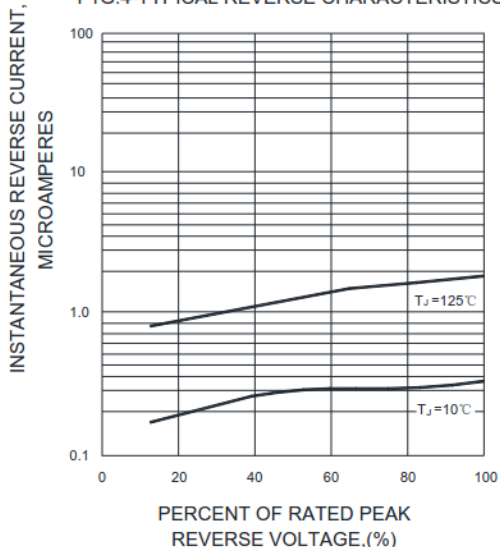

F1G.5-TYPICAL JUNCTION CAPACITANCE

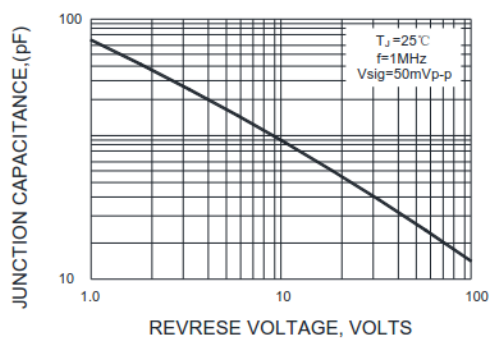

Note: Specifications are subject to change without notice.