

# Kingtronics®

# ABS1 THRU ABS10

## SURFACE MOUNT FAST SWITCHING RECTIFIER

**REVERSE VOLTAGE** 50 to 1000 Volts    **FORWARD CURRENT** 1.0 Ampere


### FEATURES

- Glass passivated chip junction
- Ideal for surface mounted applications
- Low leakage
- High forward surge current capability
- High temperature soldering guaranteed:  
260°C/10 seconds at terminals

### MECHANICAL DATA

- Case: Molded plastic body
- Epoxy: UL94V-0 rate flame retardant
- Polarity: Molded on body
- Lead: Plated terminals solderable per MIL-STD-202E method 208C
- Weight: 0.003 ounce, 0.1 gram

### ABS

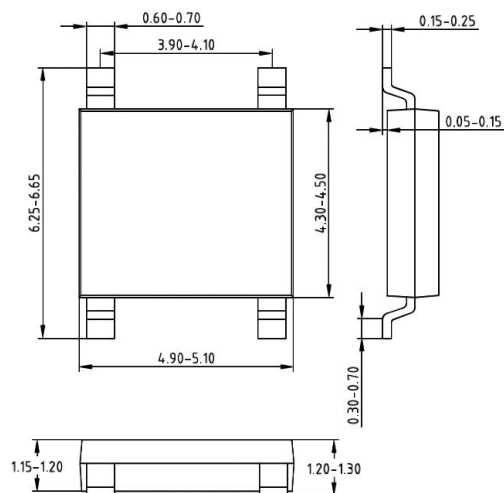

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified , Dimensions in inches and (millimeters)  
 Single phase, half wave, 60Hz, resistive or inductive load.  
 For capacitive load derate current by 20%

PARAMETER	SYMBOL	ABS1	ABS2	ABS3	ABS4	ABS6	ABS8	ABS10	UNIT
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Output Current, 0.06" (1.5mm) lead length at $T_L=90^\circ C$ (Note 2)	$I_{(AV)}$	1.0							A
Peak Forward Surge Current, 8.3ms single half-sine-wave superimposed on rated load (JEDEC method)	$I_{FSM}$	30							A
Rating for Fusing ( $t < 8.3ms$ )	$I^2t$	10							A <sup>2</sup> s
Maximum Instantaneous Forward Voltage drop Per Bridge element 1.0A	$V_F$	1.1							V
Maximum DC Reverse Current at $T_A=25^\circ C$ at Rated DC Blocking voltage $T_A=125^\circ C$	$I_R$	5							$\mu A$
		0.5							mA
Typical Junction Capacitance (Note 1)	$C_J$	25							pF
Typical Thermal Resistance (Note 2)	$R_{\theta JC}$	40							$^\circ C/W$
Operating and Storage Temperature Range	$T_J, T_{STG}$	-55 to +150							$^\circ C$

1- Measured at 1.0MHz and applied reverse voltage of 4.0 Volts. 2- Unit mounted on P.C.B. with 5.72mm x 7.22mm copper pads.

**Kingtronics® International Company**

Website: [www.kingtronics.com](http://www.kingtronics.com)    Email: [info@kingtronics.com](mailto:info@kingtronics.com)    Tel: (852) 8106 7033    Fax: (852) 8106 7099

## RATINGS AND CHARACTERISTIC CURVES

FIG.1-FORWARD CURRENT DERATING CURVE

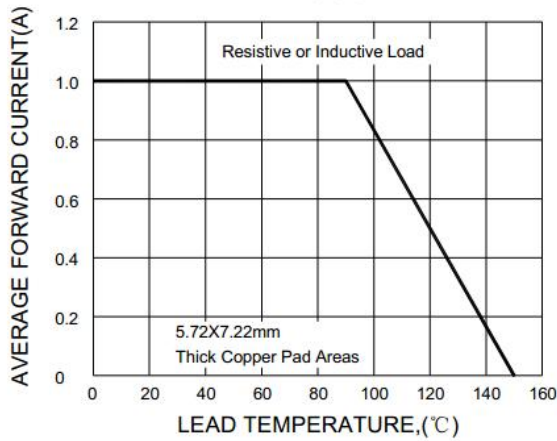


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

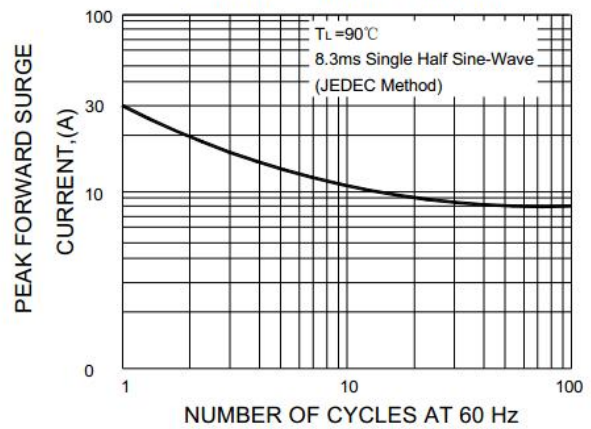


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

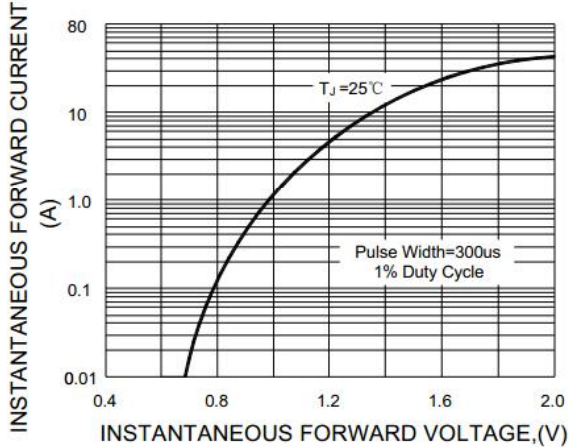


FIG.4-TYPICAL REVERSE CHARACTERISTICS

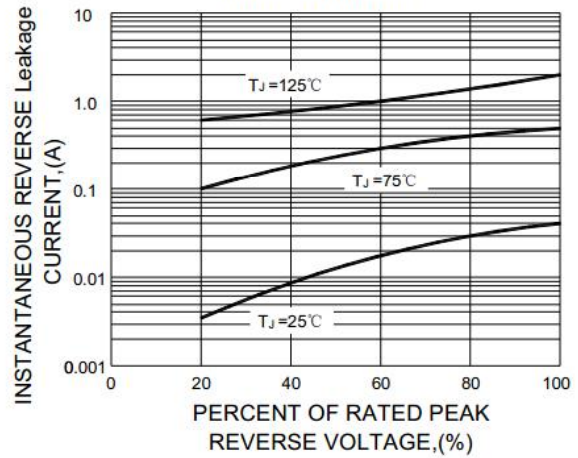


FIG.5-TYPICAL JUNCTION CAPACITANCE


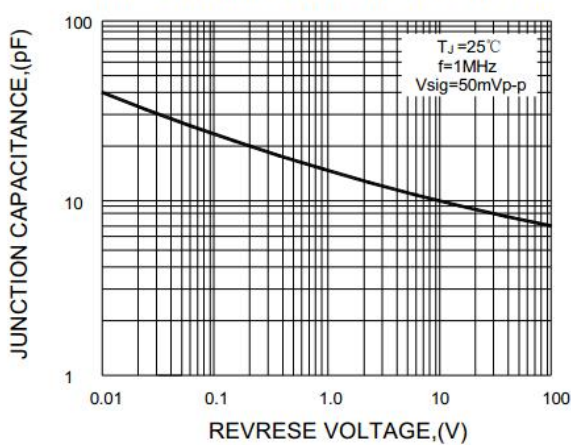


FIG.6-TRANSIENT THERMAL IMPEDANCE

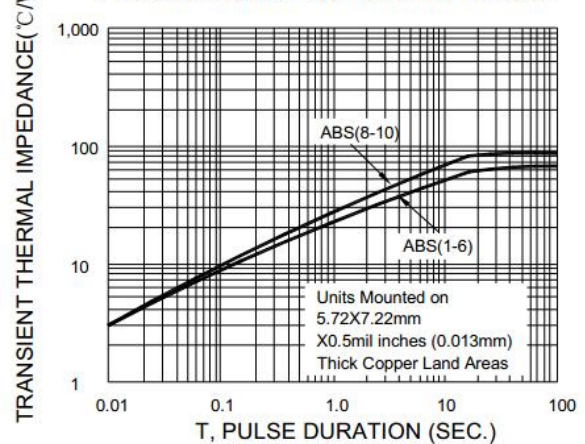

Note: Specifications are subject to change without notice.