

# FR201 THRU FR207

## FAST RECOVERY RECTIFIERS

**Reverse Voltage - 50 to 1000 Volts Forward Current - 2.0 Amperes**

### FEATURES

- ◆ The plastic package carries Underwriters Laboratory Flammability Classification 94V-0
- ◆ Fast switching for high efficiency
- ◆ Low reverse leakage
- ◆ High forward surge current capability
- ◆ High temperature soldering guaranteed:
- ◆ 250°C/10 seconds, 0.375" (9.5mm) lead length, 5 lbs. (2.3kg) tension

### MECHANICAL DATA


**Case:** JEDEC DO-15 molded plastic body

**Terminals:** Plated axial leads, solderable per MIL-STD-750, Method 2026

**Polarity:** Color band denotes cathode end

**Mounting Position:** Any

**Weight:** 0.014 ounce, 0.40 grams

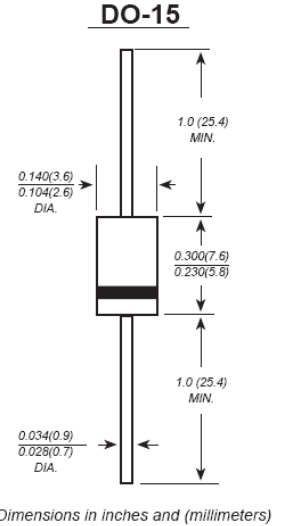

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60Hz, resistive or inductive load, for capacitive load current derate by 20%.

	SYMBOLS	FR 201	FR 202	FR 203	FR 204	FR 205	FR 206	FR 207	UNITS
Maximum repetitive peak reverse voltage	$V_{RRM}$	50	100	200	400	600	800	1000	VOLTS
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	VOLTS
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	VOLTS
Maximum average forward rectified current 0.375" (9.5mm) lead length at TA=75°C	$I_{(AV)}$	2.0							Amps
Peak forward surge current 8.3ms single half sine-wave superimposed on rated load (JEDEC Method)	$I_{FSM}$	70.0							Amps
Maximum instantaneous forward voltage at 2.0A	$V_F$	1.3							Volts
Maximum DC reverse current TA=25°C at rated DC blocking voltage TA=100°C	$I_R$	5.0 100.0							mA
Maximum reverse recovery time (NOTE 1)	$t_{rr}$	150			250		500		ns
Typical junction capacitance (NOTE 2)	$C_J$	40.0							pF
Typical thermal resistance (NOTE 3)	$R_{\theta JA}$	40.0							°C/W
Operating junction and storage temperature range	$T_J, T_{STG}$	-65 to +150							°C







**Note:** 1. Reverse recovery condition  $I_F=0.5A, I_R=1.0A, I_{rr}=0.25A$

2. Measured at 1MHz and applied reverse voltage of 4.0V D.C.

3. Thermal resistance from junction to ambient at 0.375" (9.5mm) lead length, P.C.B. mounted

# FR201 THRU FR207

## RATINGS AND CHARACTERISTIC CURVES FR201 THRU FR207

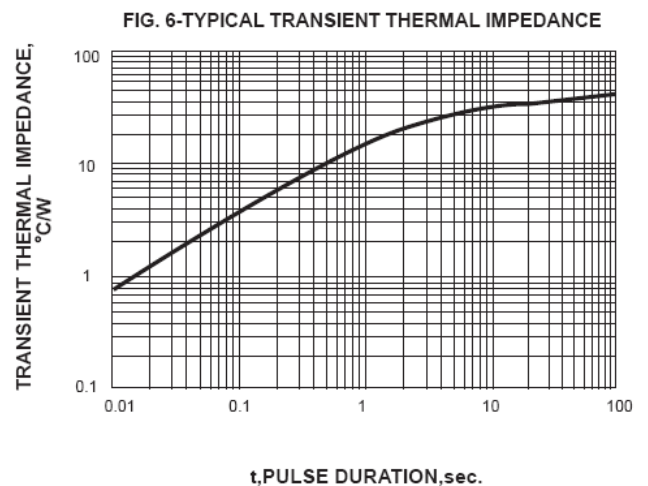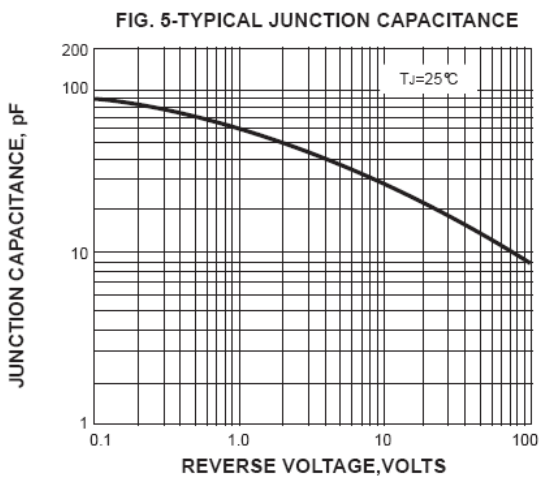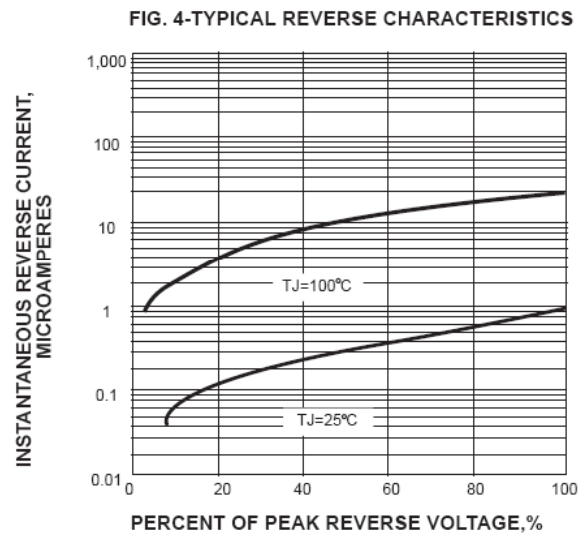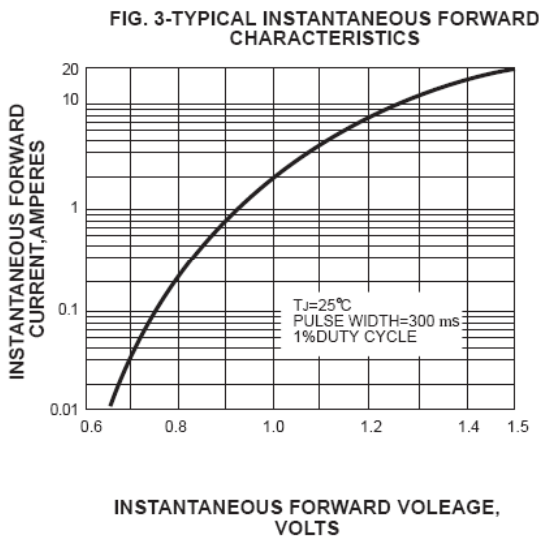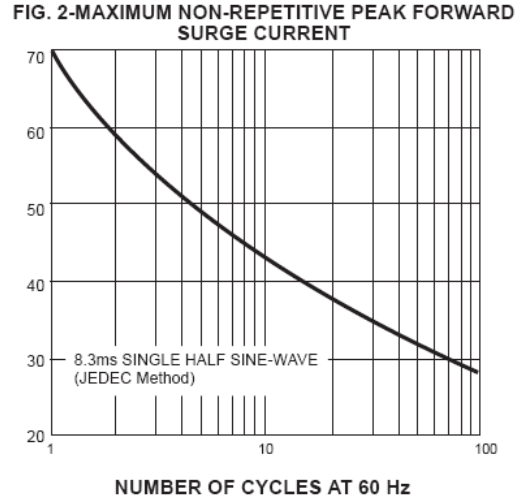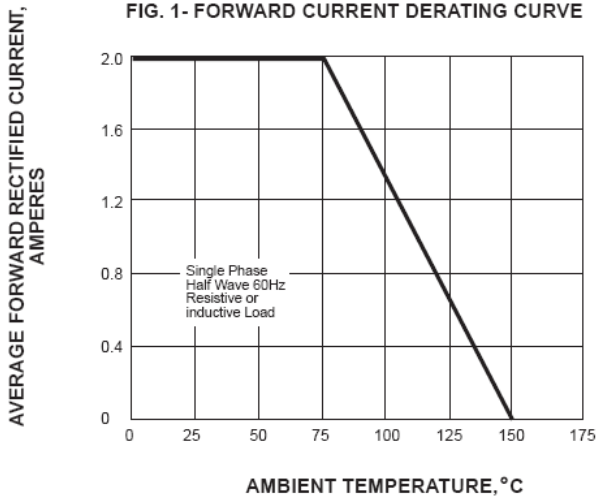

Note: Specifications are subject to change without notice.