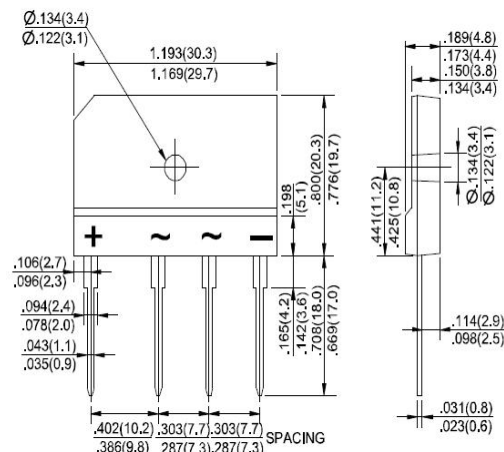


**Kingtronics**®**GBJ2501 THRU  
GBJ2510****SINGLE-PHASE GLASS PASSIVATED BRIDGE RECTIFIERS****REVERSE VOLTAGE 100 to 1000 Volts      FORWARD CURRENT 25 Ampere****FEATURES**

- Rating to 1000V PRV
- Ideal for printed circuit board
- Low forward voltage drop, high current capability
- Reliable low cost construction utilizing molded plastic technique results in inexpensive product
- The plastic material has UL flammability classification 94V-0
- Electrically isolated base-1500 Volts

**MECHANICAL DATA**

- Polarity: Symbols molded on body
- Weight: 0.26 ounces, 7.0 grams
- Mounting position : Any

**GBJ****MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Ratings at 25°C ambient temperature unless otherwise specified , Dimensions in inches and (millimeters)  
 Single phase, half wave, 60Hz, resistive or inductive load.  
 For capacitive load derate current by 20%

PARAMETER	SYMBOL	GBJ2501	GBJ202	GBJ2504	GBJ2506	GBJ2508	GBJ2510	UNIT
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	100	200	400	600	800	1000	V
Maximum Average Forward(with heatsink Note 2) Rectified Current @ $T_C=110^\circ\text{C}$ (without heatsink)	$I_{(AV)}$	25.0 4.2						A
Peak Forward Surge Current 8.3ms single half sine-wave superimposed on rated load (JEDEC METHOD)	$I_{FSM}$	300						A
Maximum forward Voltage at 12.5A DC	$V_F$	1.0						V
Maximum DC Reverse Current @ $T_J=25^\circ\text{C}$ at Rated DC Blocking voltage @ $T_J=125^\circ\text{C}$	$I_R$	5.0 500						$\mu\text{A}$
$I^2t$ Rating for fusing( $t<8.3\text{ms}$ )	$I^2t$	510						$\text{A}^2\text{S}$
Typical Junction Capacitance per element(Note 1)	$C_J$	85						pF
Typical Thermal Resistance (Note 2)	$R_{\theta JC}$	1.0						$^\circ\text{C}/\text{W}$
Operating Temperature Range	$T_J$	-55 to +150						$^\circ\text{C}$
Storage Temperature Range	$T_{STG}$	-55 to +150						$^\circ\text{C}$

1- Measured at 1.0MHz and applied reverse voltage of 4.0V DC.






2- Device mounted on 75mm x 75mm x 1.6mm Cu Plate Heatsink.

**Kingtronics**® International Company

# Kingtronics®

# GBJ2501 THRU GBJ2510

## RATINGS AND CHARACTERISTIC CURVES

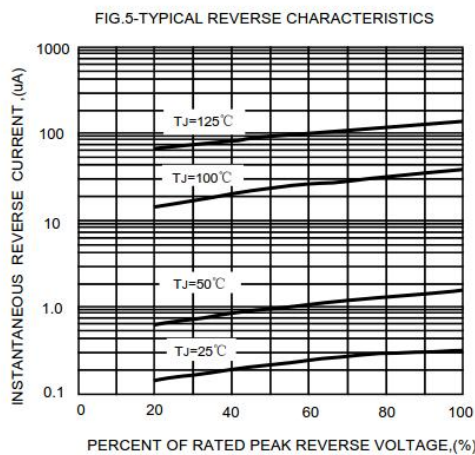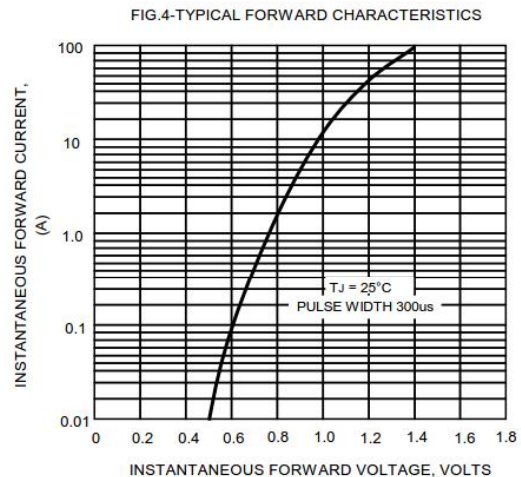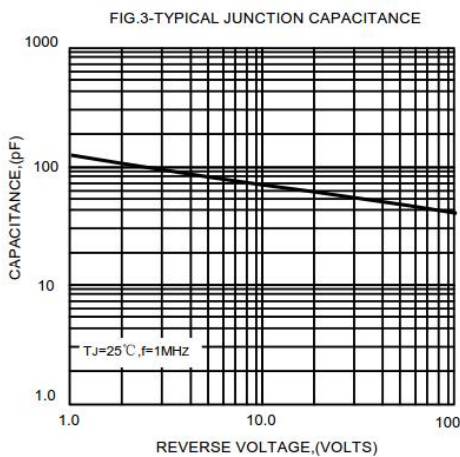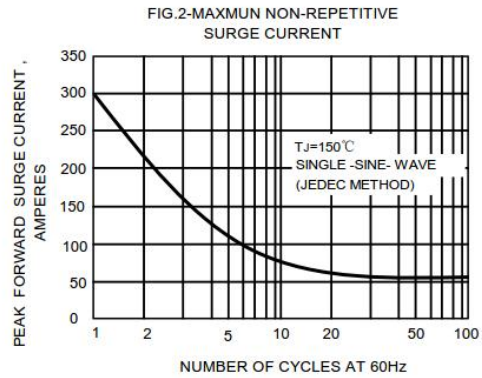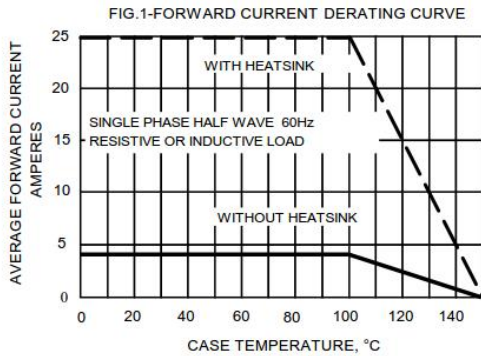

Note: Specifications are subject to change without notice.

**Kingtronics® International Company**