

Kingtronics®

GKT-VN

Aluminum Electrolytic Capacitor– SMD

FEATURES


- ◆ Bi-polar with general temperature -55°C~+105°C
- ◆ Load life of 2000 hours.
- ◆ Lead-free reflow soldering is available subject to customers' request.



SPECIFICATIONS

OPERATING TEMPERATURE	-55°C ~ +105°C				
Voltage Range	6.3V ~ 50V.DC				
Capacitance Range	0.1 ~ 47μF				
Capacitance Tolerance	±20% at 120Hz, 20°C				
Leakage Current	Leakage current ≤ 0.05CV or 10μA, whichever is greater (After 2 minutes application of rated voltage)				
Dissipation Factor (Tan δ)	Measurement Frequency: 120Hz, Temperature: 20°C				
	Rated Voltage (V)	6.3	10	16,25	35,50
Stability At Low Temp.	Tan δ (Max.)	0.24	0.20	0.17	0.15
	Measurement Frequency: 120Hz				
	Rated Voltage (V)	6.3	10	16,25	35,50
Load Life	Impedance Ratio	Z(-25°C) / Z(20°C)	4	3	2
	ZT / Z20 (Max.)	Z(-40°C) / Z(20°C)	8	6	4
	After 2000 hours application of rated voltage at 105°C (the polarity needs to exchange every 250 hours), Capacitors meet the characteristics listed below.				
Shelf Life	Capacitance Change	Within ±20% of initial value			
	Dissipation Factor	200% or less of initial specified value			
	Leakage Current	Initial specified value or less			
Resistance to Soldering Heat	After leaving capacitors under no load at 105°C for 2000 hours, They meet the specified value for load life characteristics listed above.				
	Capacitance Change	Within ± 10% of initial value			
	Leakage Current	Initial specified value or less			

DRAWING (Unit: mm)

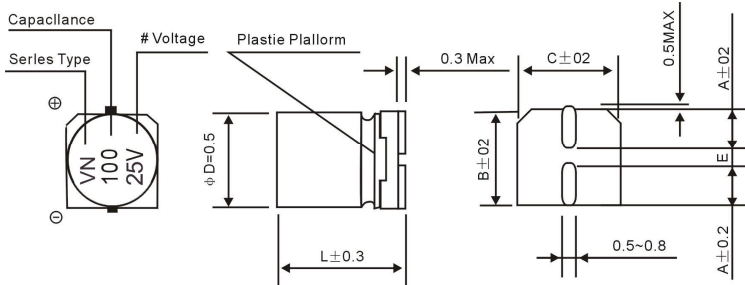

*1 Voltage mark for 6.3V is [6V]

DIMENSIONS (Unit: mm)

ØDxL	4x5.4	5x5.4	6.3x5.4
A	1.8	2.1	2.4
B	4.3	5.3	6.6
C	4.3	5.3	6.6
E	1.0	1.3	2.2
L	5.4	5.4	5.4

Kingtronics® International Company

Kingtronics®

GKT-VN

Aluminum Electrolytic Capacitor– SMD

DIMENSIONS&MAXIMUM PERMISSIBLE RIPPLE CURRENT

WVV		6.3		10		16		25		35		50	
		0J		1A		1C		1E		1V		1H	
Cap/μF													
0.1	0R1	--	--	--	--	--	--	--	--	--	--	4x5.4	1.0
0.22	R22	--	--	--	--	--	--	--	--	--	--	4x5.4	2.0
0.33	R33	--	--	--	--	--	--	--	--	--	--	4x5.4	2.8
0.47	R47	--	--	--	--	--	--	--	--	--	--	4x5.4	4.0
1	010	--	--	--	--	--	--	--	--	--	--	4x5.4	8.4
2.2	2R2	--	--	--	--	--	--	--	--	4x5.4	8.4	5x5.4	13
3.3	3R3	--	--	--	--	--	--	5x5.4	12	5x5.4	16	5x5.4	17
4.7	4R7	--	--	--	--	4x5.4	12	5x5.4	16	5x5.4	18	6.3x5.4	20
10	100	--	--	4x5.4	17	5x5.4	23	6.3x5.4	27	6.3x5.4	29	--	--
22	220	5x5.4	28	6.3x5.4	33	6.3x5.4	37	--	--	--	--	--	--
33	330	6.3x5.4	37	6.3x5.4	41	6.3x5.4	49	--	--	--	--	--	--
47	470	6.3x5.4	45	--	--	--	--	--	--	--	--	Case size	Allowable ripple

Allowable Ripple (mA rms) at 105°C 120Hz

FREQUENCY COEFFICIENT OF ALLOWABLE RIPPLE CURRENT

Frequency	50Hz	120Hz	300Hz	1KHz	10KHz
Coefficient	0.70	1.00	1.17	1.36	1.50

Kingtronics® International Company

Website: www.kingtronics.com Email: info@kingtronics.com Tel: (852) 8106 7033 Fax: (852) 8106 7099

Kingtronics®

GKT-VN

Aluminum Electrolytic Capacitor– SMD

HOW TO ORDER

<u>GKT</u>	<u>VN</u>	<u>0J</u>	<u>M</u>	<u>220</u>	<u>040054</u>	<u>I</u>	<u>R</u>
Series	Sub Series	Voltage	Capacitance Tolerance	Capacitance	Case Size	Packing	Pb
		1.	2.	3.	4.	5.	6.

NOTE:

1. Rated Voltage

Code	0G	0J	1A	1C	1E	1V	1H	1J	2A
Voltage	4	6.3	10	16	25	35	50	63	100

2. Capacitance Tolerance

Code	K	M	Q	T
Tolerance	±10%	±20%	+30-10%	+50-10%

3. Capacitance

Code	0R1	R47	010	4R7	100	470	101	471	102	472	103
Capacitance (µF)	0.1	0.47	1	4.7	10	47	100	470	1000	4700	10000

4. Case Size

Code	040054	050054	063054	080105	100105	125135	160215
Case Size (mm)	4x5.4	5x5.4	6.3x5.4	8x10.5	10x10.5	12.5x13.5	16x21.5

5. Packing

Code	T
Packing	Tape & Reel

6. Pb

Code	R
Pb	RoHS

Note: Specifications are subject to change without notice.

Kingtronics® International Company

Website: www.kingtronics.com Email: info@kingtronics.com Tel: (852) 8106 7033 Fax: (852) 8106 7099