

Kingtronics®**1N5817HS THRU
1N5819HS**

Surface Mount Schottky Barrier Rectifier


FEATURES

Reverse Voltage - 20 to 40 V

Forward Current - 1 A

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

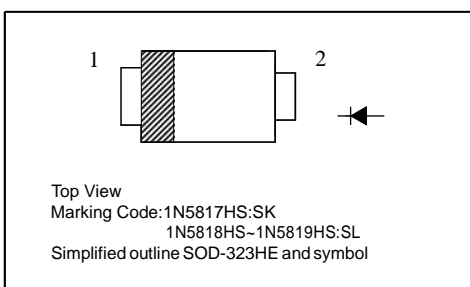**Absolute Maximum Ratings and Characteristics**

Ratings at 25°C ambient temperature unless otherwise specified, single phase, half wave, resistive or inductive load. For capacitive load, derate by 20%

Parameter	Symbols	1N5817HS	1N5818HS	1N5819HS	Units
Maximum Repetitive Peak Reverse Voltage	V_{RRM}	20	30	40	V
Maximum RMS Voltage	V_{RMS}	14	21	28	V
Maximum DC Blocking Voltage	V_{DC}	20	30	40	V
Maximum Average Forward Rectified Current	$I_{F(AV)}$		1		A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load(JEDEC methode)	I_{FSM}		25		A
Maximum Instantaneous Forward Voltage at $I_F = 1$ A at $I_F = 3$ A	V_F	0.45 0.75	0.55 0.875	0.6 0.9	V
Maximum Instantaneous Reverse Current at Rated DC Blocking Voltage ¹⁾	I_R		0.5 10		mA
Typical Junction Capacitance ²⁾	C_J		110		pF
Typical Thermal Resistance, Junction to Ambient ³⁾	$R_{\theta JA}$		75		°C/W
Operating Junction Temperature Range	T_j		- 55 to + 125		°C
Storage Temperature Range	T_{stg}		- 55 to + 150		°C

¹⁾ Pulse test: 300 μ s pulse width, 1% duty cycle

²⁾ Mearsured at 1 MHz and reverse voltage of 4 V

³⁾ Thermal resistance junction to ambient 0.24" X 0.24"(6 X 6 mm) copper pads to each terminals

Kingtronics® International CompanyWebsite: www.kingtronics.comEmail: info@kingtronics.com

Tel: (852) 8106 7033

Fax: (852) 8106 7099

Kingtronics®

1N5817HS THRU 1N5819HS

FIG.1-FORWARD CURRENT DERATING CURVE

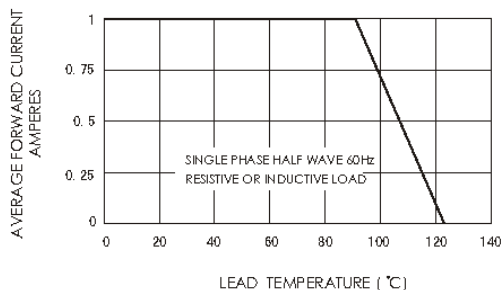


FIG.2-MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

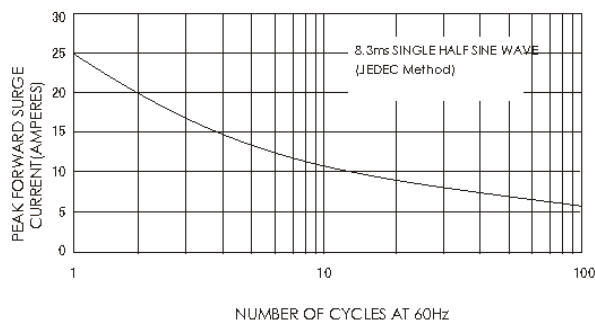


FIG.3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS

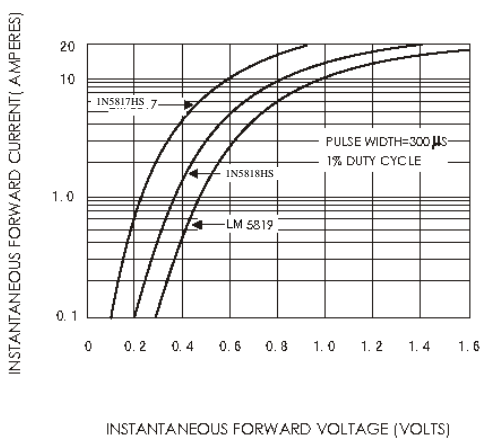


FIG.4-TYPICAL REVERSE CHARACTERISTICS


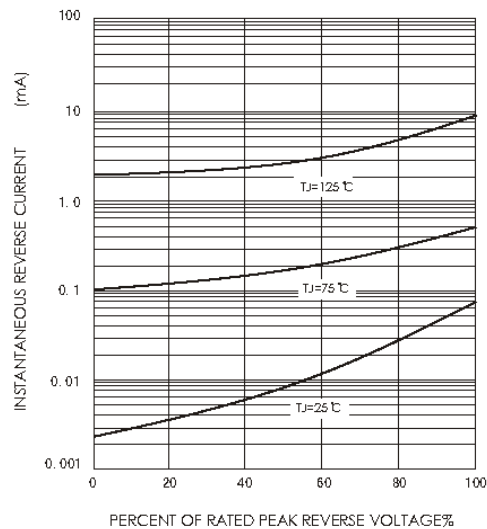


FIG.5-TYPICAL JUNCTION CAPACITANCE

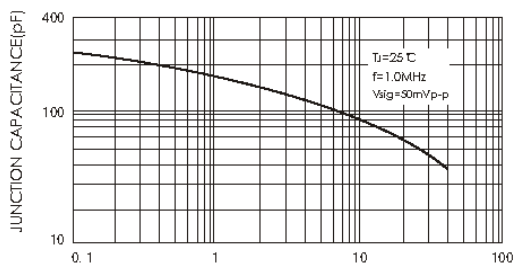

Kingtronics® International Company


Kingtronics®

1N5817HS THRU 1N5819HS

PACKAGE OUTLINE


Plastic surface mounted package; 2 leads

SOD-323HE

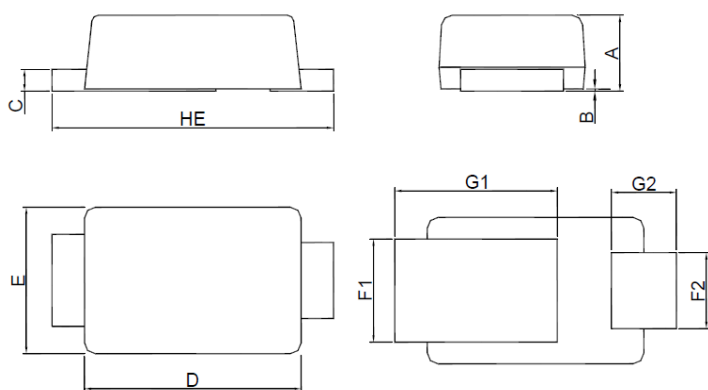

UNIT	A	B	C	D	E	F1	F2	G1	G2	H _E
mm	0.7	0.02	0.2	2	1.35	0.95	0.7	1.5	0.6	2.6
	0.5	0	0.1	1.8	1.15	0.75	0.5	1.3	0.4	2.4

Recommended Soldering Footprint



Packing information

Package	Tape Width (mm)	Pitch		Reel Size		Per Reel Packing Quantity
		mm	inch	mm	inch	
SOD-323HE	8	4 ± 0.1	0.157 ± 0.004	178	7	3,000

Note: Specifications are subject to change without notice.

Kingtronics® International Company

Website: www.kingtronics.com Email: info@kingtronics.com Tel: (852) 8106 7033 Fax: (852) 8106 7099