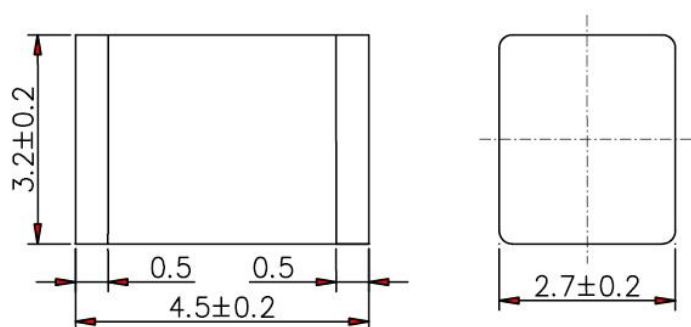


Kingtronics®**SKT - Surge Arresters****Gas Tube Surge Arresters SKT-2R-SMD4532****COMMON DIMENSIONS****PICTURE****Electrical Characteristics**

Type	DC Breakdown Voltage (@100V/S) (V)	Tolerance of DCBV	Impulse Breakdown Voltage (@1000V/μs) (V)	AC Discharge Current (@50Hz) (A)	Surge Discharge Current (@10/1000μs) (A)	Surge Discharge Current (@8/20μs) (KA)	Insulation Resistance (MΩ)	Electrode Capacitance (@1MHz) (pF)
SKT-2R-SMD4532-075M	75	± 20%	≤650	2	50	2	≥10000	≤1
SKT-2R-SMD4532-090M	90							
SKT-2R-SMD4532-150M	150	± 20%	≤650	2	50	2	≥10000	≤1
SKT-2R-SMD4532-230M	230							
SKT-2R-SMD4532-250M	250	± 20%	≤800	2	50	2	≥10000	≤1
SKT-2R-SMD4532-300M	300							
SKT-2R-SMD4532-350M	350	± 20%	≤900	2	50	2	≥10000	≤1
SKT-2R-SMD4532-400M	400							
SKT-2R-SMD4532-420M	420	± 20%	≤1000	2	50	2	≥10000	≤1
SKT-2R-SMD4532-470M	470							
SKT-2R-SMD4532-600M	600	± 20%	≤1200	2	50	2	≥10000	≤1
SKT-2R-SMD4532-800M	800							

Note: Specifications are subject to change without notice.

Kingtronics® International CompanyWebsite: www.kingtronics.comEmail: info@kingtronics.com

Tel: (852) 8106 7033

Fax: (852) 8106 7099