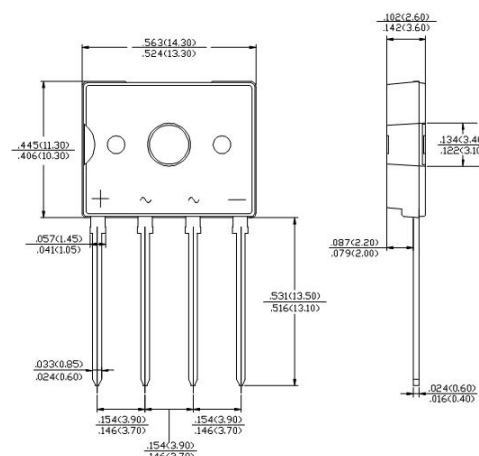


**Kingtronics**®**D2UB05 THRU  
D2UB100****Single Phase 2.0 AMPS. Glass Passivated Bridge Rectifiers**  
Voltage Range 50 to 1000 Volts Current 2.0 Amperes**FEATURES**

- ◆ Ideal for printed circuit boards
- ◆ Reliable low cost construction technique results in inexpensive product
- ◆ High temperature soldering guaranteed:  
260°C/10 seconds

**MECHANICAL DATA**

- ◆ Case: Molded plastic
- ◆ Lead: solder plated
- ◆ Polarity: As marked on body
- ◆ Mounting Torque: 0.8N-m
- ◆ Recommended Torque: 0.5N-m

**Package: D3K**

Dimensions in inches and (millimeters)

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Rating at 25°C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%

Type Number		D2UB	D2UB	D2UB	D2UB	D2UB	D2UB	D2UB	UNITS
		05	10	20	40	60	80	100	
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V
Maximum DC blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at	I <sub>F(AV)</sub>				2.0 <sup>(1)</sup>				A
					1.0 <sup>(2)</sup>				
Peak Forward Surge Current, 8.3 ms Single Half Sine-wave Superimposed on Rated Load (JEDEC method)	I <sub>FSM</sub>				35				A
Maximum Instantaneous Forward Voltage @ 2A	V <sub>F</sub>				1.1				V
Rating for fusing (3ms≤t<8.3ms) T <sub>J</sub> =25°C	I <sup>2</sup> t				3.5				A <sup>2</sup> sec
Maximum DC Reverse Current @ T <sub>A</sub> =25°C	I <sub>R</sub>				5.0				μA
Typical Thermal Resistance (Note)	R <sub>θJA</sub>				40				°C/W
	R <sub>θJC</sub>				3.5				
Operating Temperature Range	T <sub>J</sub>				-55 to +150				°C
Storage Temperature Range	T <sub>STG</sub>				-55 to +150				°C

**NOTE:** 1. Unit case mounted on 1.6\*1.6\*0.06" thick (5.1\*5.1\*0.15cm) Al. Plate

2. Unit mounted on P.C.B. with 0.5\*0.5" (12.7\*1.27mm) copper pads and 0.375" (9.5mm) lead length

**Kingtronics**® International CompanyWebsite: [www.kingtronics.com](http://www.kingtronics.com)Email: [info@kingtronics.com](mailto:info@kingtronics.com)

Tel: (852) 8106 7033

Fax: (852) 8106 7099

# Kingtronics®

# D2UB05 THRU D2UB100

## RATING AND CHARACTERISTIC CURVES D2UB05 THRU D2UB100

FIG. 1-MAXIMUM NONO-REPETITIVE FORWARD SURGE CURRENT

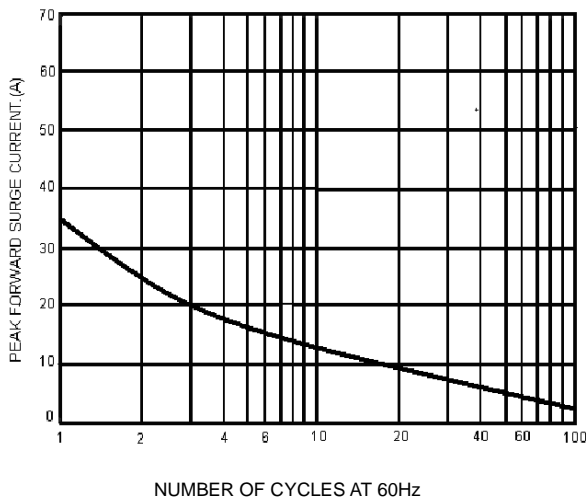


FIG. 2-MAXIMUM FORWARD CURRENT DERATING CURVE

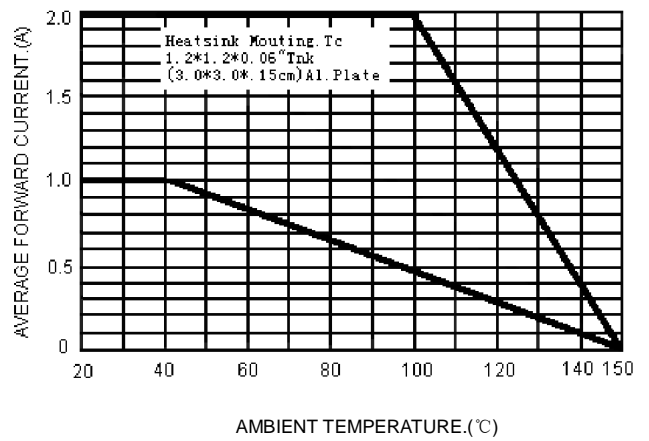


FIG. 3-TYPICAL INSTANTANEOUS FORWARD CHARACTERISTICS PER BRIDGE ELEMENT


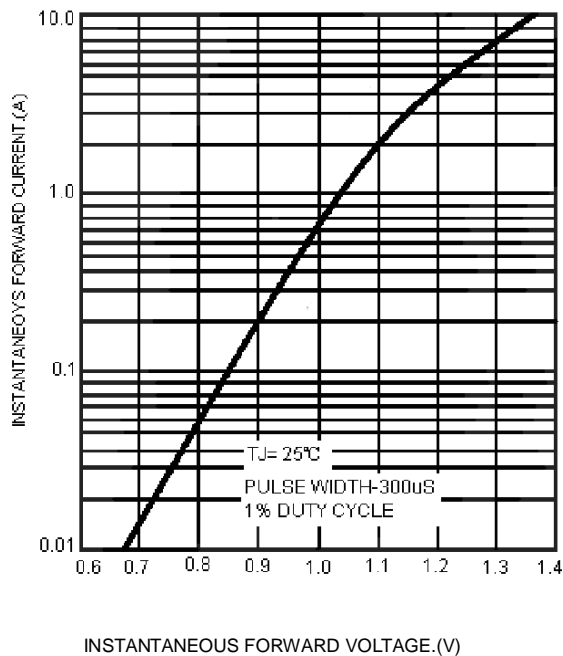


FIG. 4-TYPICAL REVERSE CHARACTERISTICS PER BRIDGE ELEMENT

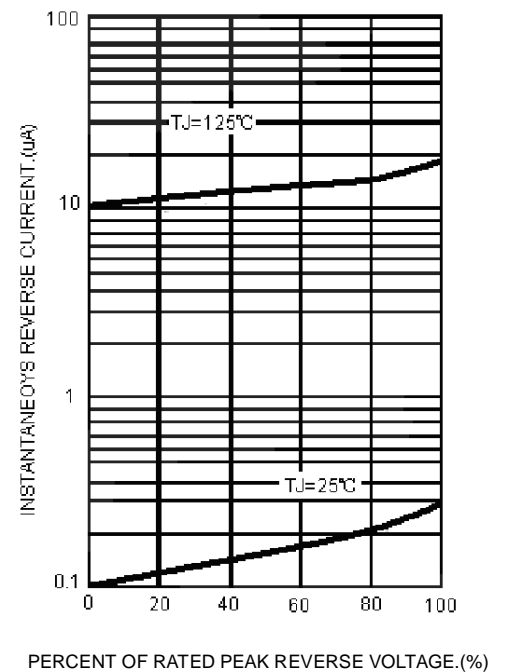

Note: Specifications are subject to change without notice.

**Kingtronics® International Company**

Website: [www.kingtronics.com](http://www.kingtronics.com) Email: [info@kingtronics.com](mailto:info@kingtronics.com) Tel: (852) 8106 7033 Fax: (852) 8106 7099