

Kingtronics®

TKT


Tantalum Capacitor— Dipped

Brief Introduction

TKT series sinter-anode, epoxy-coated solid electrolyte tantalum capacitors are encapsulated with flame Retardant yellow epoxy powder, marked with laser. TKT Series meets and exceeds the requirements of IEC Specification 384-15-3, IECQ Specification QC300201/US003 and Technical Specification SJ/T10856-96, used In military (on request) and civil applications such as TV sets, camcorders, computers, Program-controlled electronic telephone switching systems, telephones, instruments and meters.

SPECIFICATIONS

OPERATING TEMPERATURE	-55°C to +125°C with rated voltage derating.
RATED VOLTAGE	See table 1
DC LEAKAGE AT 25°C	$I_o \leq 0.02C_R V_R$ or 1μA (Whichever is greater).
DISSIPATION FACTOR AT 25°C	Please See Table 3
CAPACITANCE RANGE	0.047μF to 680μF
CAPACITANCE TOLERANCE	M (±20%), K (±10%), J (±5%, for special order)
CASE SIZES AND DIMENSIONS	Please see Table 2
TEMPERATURE CHARACTERISTICS	See Table 3

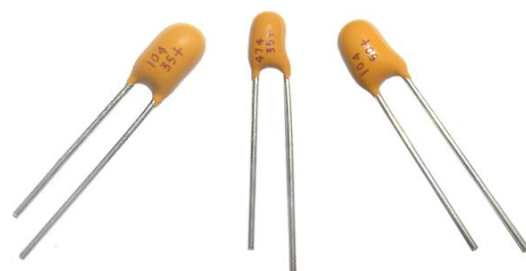

Rated Voltage, Nominal Capacitance and Case Sizes

Table 1

Rated Voltage (V)	4	6.3	10	16	20	25	35	50
Voltage Derating (V)	2.7	4	7	10	15	17	20	33
Surge Voltage (V) +85°C	5	8	13	20	26	33	46	65
Capacitance (μF)	Case Size							
0.1							A	A
0.15							A	A
0.22							A	A
0.33						A	A	A
0.47					A	A	A	A
0.68					A	A	A	B
1.0			A	A	A	A	A	B
1.5				A	A	A	A	B
2.2			A	A	A	A	B	C
3.3		A	A	A	A	A	B	C
4.7	A	A	A	A	A	B	B	D
6.8	A	A	A	A	B	B	C	D
10	A	A	A	A	B	B	C	E
15	A	A	A	B	C	C	D	E
22	A	A	B	B	C	C	D	F
33	A	B	B	C	C	D	E	
47	B	B	C	C	D	D	E	
68	B	C	C	D	D	E		
100	C	C	C	D	E	E		
150	C	D	D	E	E			
220	D	D	E	E				
330	D	E	E					
470	E	E						
680	E	F						

Kingtronics® International Company

Kingtronics®

TKT

Tantalum Capacitor— Dipped

Dimensions (unit: mm)


Table 2

Case Size	D (max)	L (max)	A1	A2	d (±0.05mm)
A	4.5	7.0	2.54	5.08	0.5
B	5.0	8.0	2.54	5.08	0.5
C	5.5	9.5	2.54	5.08	0.5
D	6.5	11.0	2.54	5.08	0.5
E	8.5	13.0	2.54	5.08	0.5
F	9.5	16.5	2.54	5.08	0.5


Temperature Characteristics

Table 3


Capacitance (uF)	Cap. Change (%)			DF Max. (%)				DCL Max. (μF)			
	-55°C	+85°C	+125°C	-55°C	+25°C	+85°C	+125°C	+25°C	+85°C	+125°C	
<1.0				6	4	6	6	I _o ≤ 0.02 C _{RVR} or 1uF whichever is greater			
1.5 ~ 6.8				8	6	8	8				
10 ~ 68	± 10	± 15	± 25	10	8	10	10		+10 I _o	+12.5 I _o	
100 ~ 680				12	10	12	12				

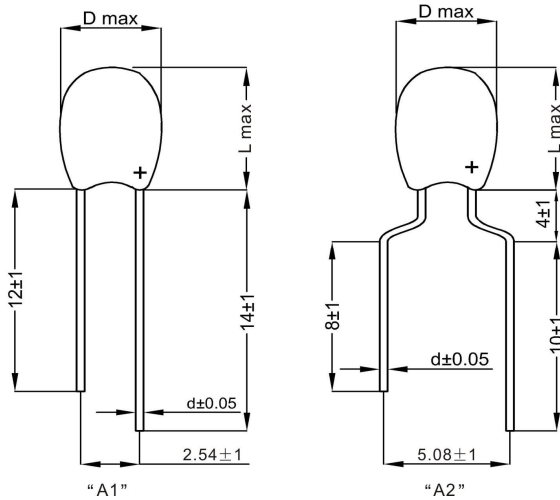

Sintered Cylindrical Epoxy-coated Solid Electrolyte Tantalum Capacitor

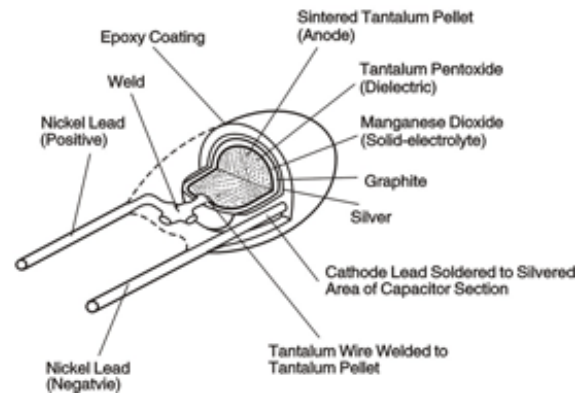

Typical Characteristic Curve

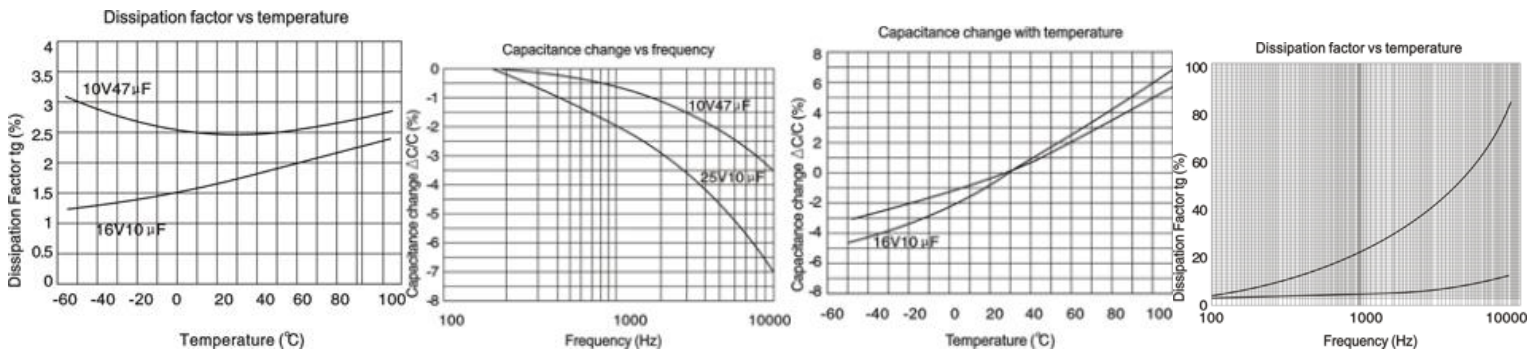

Kingtronics® International Company

Website: www.kingtronics.com

Email: info@kingtronics.com

Tel: (852) 8106 7033

Fax: (852) 8106 7099

Kingtronics®

TKT

Tantalum Capacitor— Dipped

HOW TO ORDER

<u>TKT</u>	<u>0R1</u>	<u>M</u>	<u>350</u>	<u>2</u>	<u>B</u>	<u>R</u>
Series	1.	2.	3.	4.	5.	6.

NOTE:

1. Nominal Capacitance

Code	0R1	R22	010	2R2	220	221
Capacitance	0.1uF	0.22uF	1uF	2.2uF	22uF	220uF

2. Capacitance Tolerance

Code	J	K	M
Tolerance	±5%	±10%	±20%

3. Rated Voltage

Code	040	060	100	160	200	250	350	500
Voltage	4V	6.3V	10V	16V	20V	25V	35V	50V

4. Pitch

Code	2	5
Pitch (mm)	2.54	5.08

5. Packing

Code	A	B
Packing	Ammo	Bulk

6. Pb

Code	L	R
Pb	Leaded	RoHS

Note: Specifications are subject to change without notice.

Kingtronics® International Company

Website: www.kingtronics.com Email: info@kingtronics.com Tel: (852) 8106 7033 Fax: (852) 8106 7099